


ANZ

We offer solutions for smooth and trouble free
Oilfield drilling operations

OCTG ITEM | CEMENTING TOOL | COMPLETION TOOLS | CHEMICALS

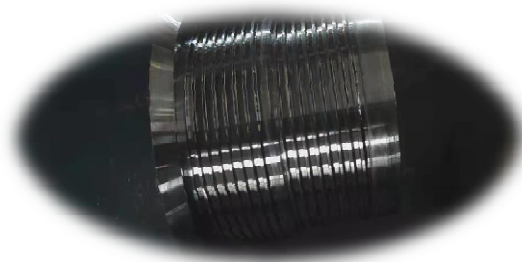

ANZ OILFIELD SERVICES PRIVATE LIMITED



www.anzoilfield.com



ANZ

Introduction of ANZ Group

ANZ Oilfield Services Pvt. Limited is promoted by the SANALI Group which is a leader in the fields of Infrastructure, Energy, Power, Mining & IT sector, with ANZ we have ventured to offer customized solutions for Oil and Gas exploration companies with highest quality Products and Services.

ANZ includes a team of highly experienced professionals with vast knowledge and years of hands on job expertise in Oil and Gas Drilling projects, we offer full range of solutions that can optimize and add value to the Up-Stream segment.

ANZ offers the highest quality OCTG Items, Casing Accessories , Down hole Tools, Drilling Chemicals, oilfield tools & equipment to suit customers requirements in line with global industry standards. ANZ offers products that are manufactured in state of art facility recognized by API, ISO & GOST –R Global Certifications agencies for Casing & Tubing, Drill collar & pipes, crossovers & Pup joints, Casing accessories, Drilling Chemicals, Cementing additives, mud chemicals, Centralizer, Float equipment, Bridge Plug, Cement retainers, Packers, liner hangers etc and other Oilfield tools.

We are offering following product lines from reputed manufacturers following high quality standards and competitive pricing:



ANZ OILFIELD SERVICES PRIVATE LIMITED

A reliable & quality products & solutions for smooth and trouble free oilfield drilling operation

ANZ

Products offered

Casing & Tubing	Drilling Chemicals	Liner Hanger	Reamer shoe
Drill Collar	Cement additive	Casing Packer	Float equipment
Drill pipe	Mud Chemicals	Cement retainer	Cement Plugs
Drill bit	Crossover & Pup Joints	Stage Tools	Centralizers

Technical Support for supplied products

ANZ Oilfield offers 24x7 technical supports for all equipment supplied to end user by offering guidance in best use practices for its equipments and offering immediate solutions and advise on any technical issue faced by end user during oilfield drilling/cementing operations.

This close working partnership has ensured a close relationship between our technical experts and end users /distributors. Our technical expertise and close Technical support is the biggest factor which makes ANZ Oilfield stand apart from other suppliers.

ANZ Oilfield Services adds value to its global associates by ensuring “on time” delivery of its high quality equipment and works closely with associates to develop new solutions for emerging challenges faced by end users.

If you are looking for reliable & quality products & solutions for smooth and trouble free oilfield drilling.



ANZ OILFIELD SERVICES PRIVATE LIMITED

A reliable & quality products & solutions for smooth and trouble free oilfield drilling operation

Products offered

ANZ

OCTG PIPES

Size		Steel Grade & Connection Type									Standards
ODmm(in)	WT /mm	V150	J55 K55	M65	L80-1 L/BO-13C.R95	N80-1/N 80Q	C90/T95	C110	P110	Q125	
114.30(4-1/2")	5.21	S/B	S	S							
	5.69		S/B	S/B							
	6.35		S/L/B	L/B	L/B	L/B	L/B		L/B		
	7.37			L/B	L/B	L/B	L/B		L/B		
	8.56	L/B							L/B	L/B	
127.00(5")	5.59		S	S							
	6.43		S/L/B	S/L/B							
	7.52		S/L/B	L/B	S/L/B	S/L/B	L/B		S/L/B		
	9.19	L/B		L/B	S/L/B	S/L/B	L/B		S/L/B	L/B	
	11.10	L/B		L/B	L/B	L/B	L/B		L/B	L/B	
	12.14	L/B			L/B	L/B	L/B		L/B	L/B	
	12.70	L/B			L/B	L/B	L/B		L/B	L/B	
139.70(5-1/2")	6.20		S	S							
	6.98		S/L/B	S/L/B							
	7.72		S/L/B	S/L/B	S/L/B	S/L/B	L/B		S/L/B		
	9.17			L/B	S/L/B	S/L/B	L/B		S/L/B		
	10.54	S		L/B	S/L/B	S/L/B	L/B		S/L/B	S/L/B	
168.28(6-5/8")	7.32		S/L/B	S/L/B							
	8.94		S/L/B	S/L/B	S/L/B	S/L/B	L/B		S/L/B		
	10.59			L/B	S/L/B	S/L/B	L/B		S/L/B		
	12.06	L/B			S/L/B	S/L/B	L/B		S/L/B	L/B	
177.8(7")	6.91		S	S							
	8.05		S/L/B	L/B	S/L/B	S/L/B	L/B				
	9.19			L/B	S/L/B	S/L/B	L/B		S/L/B		
	10.36			L/B	S/L/B	S/L/B	L/B		S/L/B		
	11.51			L/B	S/L/B	S/L/B	L/B		S/L/B		
	12.65				S/L/B	S/L/B	L/B		S/L/B	S/L/B	
	13.72				S/L/B	S/L/B	L/B		S/L/B	S/L/B	
193.67(7-5/8")	8.33		S/L/B	S/L/B	1 L/B	L/B	L/B				
	9.52			L/B	L/B	L/B	L/B		L/B		
	10.92			L/B	L/B	L/B	L/B		L/B		
	12.70	L/B			L/B	L/B	L/B		L/B	L/B	
	14.27	L/B			L/B	L/B	L/B		L/B	L/B	
	15.11	L/B			L/B	L/B	L/B		L/B	L/B	
	15.88	L/B			L/B	L/B	L/B		L/B	L/B	

API SPEC 5CT PSL1 PSL2 PSL3



ANZ OILFIELD SERVICES PRIVATE LIMITED

A reliable & quality products & solutions for smooth and trouble free oilfield drilling operation

Products offered

ANZ

OCTG PIPES

Size		Steel Grade & Connection Type									Standards
ODmm(in)	WT /mm	V150	J55 K55	M65	L80-1 L/BO-13C.R95	N80-1/N 80Q	C90/T95	C110	P110	Q125	
219.08(8-5/8")	6.71		S	S	S						API SPEC 5CT PSL1 PSL2 PSL3
	7.72		S/L/B	S							
	8.94		S/L/B	S/L/B							
	10.16			S/L/B	L/B	L/B	L/B		L/B		
	11.43			L/B	L/B	L/B	L/B		L/B		
	12.70				L/B	L/B	L/B		L/B		
	14.15	L/B			L/B	L/B	L/B		L/B	L/B	
244.48(9-8/5")	8.94		S/L/B	S/L/B							
	10.03		S/L/B	S/L/B	L/B	L/B	L/B		L/B		
	11.05		L/B	L/B	L/B		L/B		L/B		
	11.99	L/B	L/B	L/B	L/B	L/B	L/B		L/B	L/B	
	13.84	L/B			L/B	L/B	L/B		L/B	L/B	
15.11				L/B	L/B	L/B		L/B			
273.05(10-3/4")	8.89			S/B							
	10.16		S/B	S/B							
	11.43		S/B	S/B							
	12.57				S/B	S/B	S/B		S/B		
	13.84				S/B	S/B	S/B		S/B		
15.11	S/B					S/B		S/B	S/B		
298.45(11-3/4")	9.52	S/B					S/B		S/B	S/B	
	11.05										
	12.42				S/B				S/B		
	13.56	S/B			S/B				S/B	S/B	
339.72(13- 3/8")	8.38										
	9.65		S/B	S/B							
	10.92		S/B	S/B							
	12.19			S/B	S/B	S/B	S/B		S/B		
	13.06	S/B			S/B	S/B	S/E		S/B	S/B	



Products offered



CASING AND TUBING

SIZES

OD: 1.66"—13³/₈", WT: 3–20mm

OUTSIDE DIAMETER /mm(inch)	NOMINAL WEIGHT /kgs(PPF)	WALL THICKNESS ./mm	Steel Grade
42.16 (1.660)	— (2.09)	3.18	J55 ~ Q125
	3.42 (2.30)	3.56	
	4.51 (3.03)	4.85	
48.26 (1.900)	— (2.40)	3.18	J55 ~ Q125
	4.09 (2.75)	3.68	
	5.43 (3.65)	5.08	
	6.58 (4.42)	6.35	
	7.66 (5.15)	7.62	
52.40 (2.063)	— (3.24)	3.96	J55 ~ Q125
	— (4.50)	5.72	
60.32 (2–3/8)	5.95 (4.00)	4.24	J55 ~ Q125
	6.85 (4.60)	4.83	
	8.63 (5.80)	6.45	
	9.82 (6.60)	7.49	
	10.94 (7.35)	8.53	
73.02 (2–7/8)	9.52 (6.40)	5.51	J55 ~ Q125
	11.61 (7.80)	7.01	
	12.80 (8.60)	7.82	
88.90 (3–1/2)	11.46 (7.70)	5.49	J55 ~ Q125
	13.69 (9.20)	6.45	
	15.18 (10.20)	7.34	
114.30 (4–1/2)	14.38 (9.50)	5.21	J55 ~ Q125
	15.73 (10.50)	5.69	
	17.38 (11.60)	6.35	
	19.87 (13.50)	7.37	
	22.69 (15.10)	8.56	
127.00 (5)	17.19 (11.50)	5.59	J55 ~ Q125
	19.69 (13.00)	6.43	
	22.68 (15.00)	7.52	
	27.19 (18.00)	9.19	
	32.13 (21.40)	11.10	
	34.76 (23.20)	12.14	
	36.15 (24.10)	12.70	



ANZ OILFIELD SERVICES PRIVATE LIMITED

A reliable & quality products & solutions for smooth and trouble free oilfield drilling operation

Products offered

ANZ

CASING AND TUBING

SIZES

OD: 1.66"—13³/₈", WT: 3–20mm

OUTSIDE DIAMETER /mm(inch)	NOMINAL WEIGHT /kgs(PPF)	WALL THICKNESS ./mm	Steel Grade
139.70 (5–1/2)	20.91(14.00)	6.20	J55 ~ Q125
	23.48(15.50)	6.98	
	25.72(17.00)	7.72	
	30.05(20.00)	9.17	
	34.05(23.00)	10.54	
177.80 (7)	25.60(17.00)	5.87	J55 ~ Q125
	29.91(20.00)	6.91	
	34.67(23.00)	8.05	
	34.67(23.00)	8.05	
	39.14(26.00)	9.19	
	43.60(29.00)	10.36	
	47.92(32.00)	11.51	
	47.92(32.00)	11.51	
	52.09(35.00)	12.65	
56.10(38.00)	13.72		
219.08 (8–5/8)	35.72(24.00)	6.71	J55 ~ Q125
	41.67(28.00)	7.72	
	47.62(32.00)	8.94	
	47.62(32.00)	8.94	
	53.57(36.00)	10.16	
	59.53(40.00)	11.43	
244.48 (9–5/8)	59.53(40.00)	11.43	J55 ~ Q125
	48.07(32.30)	7.92	
	53.57(36.00)	8.94	
	59.53(40.00)	10.03	
	64.74(43.50)	11.05	
	69.94(47.00)	11.99	
273.05 (10–3/4)	79.62(53.50)	13.84	J55 ~ Q125
	48.74(32.75)	7.09	
	60.27(40.50)	8.89	
	67.71(45.50)	10.16	
	75.90(51.00)	11.43	
339.72 (13–3/8)	82.59(55.50)	12.57	J55 ~ Q125
	71.43(48.00)	8.38	
	81.10(54.50)	9.65	
	90.78(61.00)	10.92	
	101.19(68.00)	12.19	



ANZ OILFIELD SERVICES PRIVATE LIMITED

A reliable & quality products & solutions for smooth and trouble free oilfield drilling operation

Products offered

ANZ

Drill Pipe



Drill pipe, is hollow, thin-walled, steel or aluminium alloy piping that is used on drilling rigs. It is hollow to allow drilling fluid to be pumped down the hole through the bit and back up the annulus. It comes in a variety of sizes, strengths, and wall thicknesses, but is typically 27 to 32 feet in length (Range 2). Longer lengths, up to 45 feet, exist (Range 3).

Size (in)	Nominal Weight (1b/ft)	OD of Pipe Body		Wall Thickness of Pipe Body		Grade	Upset Type	Conn.Type
		(in)	(mm)	(in)	(mm)			
2 3/8	6.65	2 3/8	60.32	0.28	7.11	EXGS	EU	NC26 (2 3/8 IF)
2 7/8	10.4	2 7/8	73.02	0.36	9.19			NC31 (2 7/8 IF)
3 1/2	13.3	3 1/2	88.9	0.37	9.35			NC38 (31 /2 IF)
3 1/2	15.5	3 1/2	88.9	0.45	11.4			NC38 (3 1/2 IF)
4	14	4	101.6	0.33	8.38			NC46 (4 IF)
4 1/2	16.6	4 1/2	114.3	0.34	8.56		IEU	NC40 (4 IF)
4 1/2	20	4 1/2	114.3	0.43	10.92			NC46 (4 IF)
5	19.5	5	127	0.36	9.19			NC50(4 1/2 IF)
5	19.5	5	127	0.36	9.19			5 1/2 FH
5	25.6	5	127	0.5	127			NC50(4 1/2 IF)
5	25.6	5	127	0.5	12.7			5 1/2 FH
5 1/2	21.9	5 1/2	139.7	0.36	9.17			5 1/2 FH
5 1/2	24.7	5 1/2	139.7	0.42	10.54			5 1/2 FH
6 5/8	25.2	65/8	168.28	0.33	8.38			6 5/8 FH
6 5/8	27.7	65/8	168.28	0.36	9.19			6 5/8 FH



ANZ OILFIELD SERVICES PRIVATE LIMITED

A reliable & quality products & solutions for smooth and trouble free oilfield drilling operation

Products offered

ANZ

Drill Collar



There are different kinds of drill collars, including round drill collar, spiral drill collar, non-magnetic drill collar, square drill collar and so on. Ordinary drill collar is the circular cross section, the center has a water hole, the wall thickness is larger, the nozzle is smaller, the weight of per unit length is greater than the size of drill pipe almost 4-5 times. The majority of drill collar is thread processing directly on the pipe body, but some of them also use the replaced joint.

Size	O.D.(mm)	I.D.(mm)	Code	Thread	Length(mm)	Weight(kg)
3-1/8	79.4	31.8(1-1/4)	NC23-31	NC23	9140	298
3-1/2	88.9	38.1(1-1/2)	NC26-35	NC26	9140	364
4-1/8	104.8	50.8(2)	NC31-41	NC31	9140/9450	474/490
4-3/4	120.6	50.8(2)	NC35-47	NC35	9140/9450	674/697
5	127	57.2(2-1/4)	NC38-50	NC38	9140/9450	725/749
6	152.4	57.2(2-1/4)	NC44-60	NC44	9140/9450	1125/1163
		71.4(2-13/16)	NC44-60		9140/9450	1022/1056
6-1/4	158.8	57.2(2-1/4)	NC44-62	NC44	9140/9450	1237/1279
		71.4(2-13/16)	NC46-62		9140/9450	1134/1172
6-1/2	165.1	57.2(2-1/4)	NC46-65	NC46	9140/9450	1352/1398
		71.4(2-13/16)	NC46-65	NC50	9140/9450	1249/1291
6-3/4	171.4	57.2(2-1/4)	NC46-67	NC46	9140/9450	1471/1521
7	177.8	57.2(2-1/4)	NC50-70	NC50	9140/9450	1597/1651
		71.4(2-13/16)	NC50-70		9140/9450	1494/1545
7-1/4	184.2	71.4(2-13/16)	NC50-72	NC50	9140/9450	1625/1680
7-3/4	196.8	71.4(2-13/16)	NC56-77	NC56	9140/9450	1895/1960
8	203.2	71.4(2-13/16)	NC56-80	NC56/6-5/8REG	9140/9450	2040/2109
8-1/4	209.6	71.4(2-13/16)	6-5/8REG	6-5/8REG	9140/9450	2188/2263
9	228.6	71.4(2-13/16)	NC61-90	NC61	9140/9450	2658/2748
9-1/2	241.3	76.2(2-13/16)	7-5/8REG	7-5/8REG	9140/9450	2954/3054
9-3/4	247.6	76.2(3)	NC70-97	NC70	9140/9450	3127/3234
10	254	76.2(3)	NC70-100	NC70	9140/9450	3308/3421
11	279.4	76.2(3)	8-5/8REG	8-5/8REG	9140/9450	4072/4210

Mechanical properties: <7 inch Drill Collar: Yield Strength ≥ 758MPa, Tensile Strength ≥ 965MPa, Four times elongation ≥ 13%, Impact energy Ak ≥ 54J, (Single impact work ≥ 47J, Average ≥ 54J) Hardness range 285HB-341HB ≥ 7inch Drill Collar: Yield Strength ≥ 689MPa, Tensile Strength ≥ 931MPa, Four times elongation ≥ 13%, Impact energy Ak ≥ 54J, (Single impact work ≥ 47J, Average ≥ 54J) Hardness range 285HB-341HB



Products offered

ANZ

Heavy Weight Drill Pipe



Heavy weight drill pipe is a medium-weight drill tool similar to drill pipe, whose wall is thicker than that of drill pipe and thinner than that of drill collar. Its tube is connected with special length-added drill pipe joint (integral heavy weight drill pipe is made up of tube and tool joint). Among assemblies, it is generally added between drill pipe and drill collar to prevent sudden changes in cross-section of drill string, and reduce its fatigue. Using it to replace part of the drill collar can reduce torque, improve load, and increase drilling ability during deep well drilling; meanwhile pick-up sub and safety clamp will not be used drilling operation, which is easy to operate and can save tripping time. It can drill in high speed under low torque in directional wells and reduces the abrasion and fracture of string without differential pressure and sticking because of the lower steel grade than drill collar, small touching area with the well wall.

Integral heavy weight drill pipe								
Size	Outer diameter	Inside diameter	Joint outer diameter	Joint inside diameter	Connecting thread	Slip max. diameter	Upset middle diameter	Min.drift diameter
3 1/2	3 1/2	2 1/4	4 3/4	2 1/4	NC38	3 7/8	4	2
		2 1/16	(4 7/8, 5)	2 1/16				1 13/16
4	4	2 1/2	5 1/4	2 1/2	NC40	4 3/16	4 1/2	2 1/4
		2 9/16		2 9/16				2 5/16
4 1/2	4 1/2	2 11/16	6 1/4	2 11/16	NC46	4 11/16	5	2 7/16
		2 3/4		2 3/4				2 1/2
		2 13/16		2 13/16				2 9/16
5	5	3	6 5/8	3	NC50	5 1/8	5 1/2	2 3/4
5 1/2	5 1/2	3 1/4	7	3 1/4	5 1/2 FH	5 11/16	6	3
		3 3/8	(7 1/4, 7 1/2)	3 3/8				3 1/8
		3 7/8		3 7/8				3 5/8
		4		4				3 3/4
6 5/8	6 5/8	4	8	4	6 5/8 FH	6 15/16	7 1/8	3 3/4
		4 1/2	(8 1/4, 8 1/2)	4 1/2				4 1/4
		5		5				4 3/4



ANZ OILFIELD SERVICES PRIVATE LIMITED

A reliable & quality products & solutions for smooth and trouble free oilfield drilling operation

Products offered


ANZ

Downhole Motor



Downhole motor is a kind of downhole dynamic drilling tool drove by the power of drilling mud. Mud stream from the outlet of mud pump flows through a by-pass valve into the motor. This stream produces pressure loss at both inlet and outlet of the pump, to push the rotor into rotating, and to transmit the torque and speed onto the bit. The downhole motor property mainly depends upon its property parameters.

Drilling Stabilizer



Drilling stabilizer is a piece of downhole equipment used in the bottom hole assembly (BHA) of a drill string. It mechanically stabilizes the BHA in the borehole in order to avoid unintentional sidetracking, vibrations, and ensure the quality of the hole being drilled.

Drilling Jar



Drilling jar is connected to the drill string to help release stuck drill tools during drilling operations and ensures that drilling operations can be resumed promptly. This product is especially recommended for directional, complicated and deep wells.




ANZ OILFIELD SERVICES PRIVATE LIMITED

A reliable & quality products & solutions for smooth and trouble free oilfield drilling operation

Products offered

ANZ

Crossover Sub

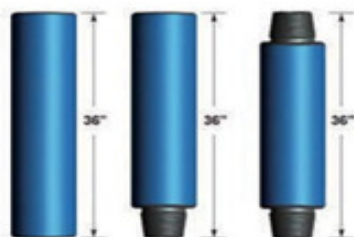

Straight OD Sub



Straight OD Sub

Straight OD Sub is used to connect drill stem members that have a similar outside diameter. The drill bit, downhole tools, heavy weight drill pipe and drill pipe can be crossed over using a straight OD sub. Reduced Section Sub is used to connect drill stem members that have different diameters that warrant the cross-sectional change necessary to accommodate different connections. This sub would be used to crossover large OD drilling tools or a tapered drill collar string.

Saver Sub



Saver Sub is used to extend the life of the Kelly by taking the connection wear each time it is make-up to a drill stem component. The saver sub connection is sacrificed because it can be easily repaired or inexpensively replaced. The saver sub can be equipped with a rubber protector to reduce BOP equipment and casing wear resulting from contact damage with a lower Kelly connection.

Lifting Sub



Lifting Sub enables the safe, efficient handling of straight OD tubulars such as drill collars, shock tools, jars, directional equipment and other tools by using the drill pipe elevators.



ANZ OILFIELD SERVICES PRIVATE LIMITED

A reliable & quality products & solutions for smooth and trouble free oilfield drilling operation

Products offered

ANZ

Inside BOP



Inside blowout preventer (Inside BOP) is a special tool, which can be striped through the BOP preempt to be connected with the added drilling tools as soon as possible, when the blowout is happened during lifting the drilling tools, the inside blowout preventer has many advantages such as high-pressure, sealed reliable, easy to operate, switch quickly and so on.

Kelly Valve



Kelly valve is a manually operated ball type drill stem valve; it is divided into upper Kelly valve and lower Kelly valve. The upper Kelly valve is connected between lower end of swivel and upper end of Kelly; the lower Kelly valve is connected between upper end of drill pipe and lower end of Kelly or connected between lower end of Kelly saver subs. The Kelly valve can be opened on or closed off by only turning the special operating wrench at 90° according to indicating direction. During drilling operation, the Kelly valve shall be connected at upper end and lower end of Kelly.

Casing Scraper



Casing Scraper is ideal for the removal of dirt which may be left over the inside walls of casing, such as solid cement, hard wax, various salt crystals or deposits, perforation burrs, iron oxide residues resulted from rusting, so as to make all down hole tools pass through unblocked. Especially when a small circular clearance is available between the down hole tools and casing inside diameter, the complete scrapping becomes more necessary before further working. At present in the large petroleum well scrapping in the internal wall of casing by use of casing scraper is a necessary step.



Chemicals



Drilling Chemicals

PRODUCT NAME	ANZ Grade
BENTONITE API SEC 9	ANZ BEN 1000
BARITE API 4.1sg	ANZ BAR 4100
BARITE API 4.2sg	ANZ BAR 4200
CALCIUM CHLORIDE 94-97%	ANZ CHLORIDE 94
CALCIUM CARBOANTE FINE	ANZ CARB FINE
CAUSTIC SODA	ANZ CAUSTIC
DRILLING DETERGENT	ANZ DD 1000
GLYCOL(MEDIUM CLOUD PT)	ANZ CP GLYCOL MC
POTASSIUM CHLORIDE 96-98%	ANZ KCL 97
LIQUID POLYAMINE SHALE INHIBITOR	ANZ POLYAMINE 1000
EP LUBE	ANZ EP 3000
SODIUM CHLORIDE	ANZ SALT
PHPA (powder, dry)	ANZ DRILLPOL 9000
SODA ASH	ANZ SODA ASH
HAEMETITE	ANZ FERROIDE 9000
LATEX(POROSEAL PLUS)	ANZ LATEX



Chemicals

ANZ

Cementing Additives

Product Name	ANZ Product
SILIKA FLOUR	ANZ-Silica Flour
SPHERLITE	ANZ-Perlite
EXPANSION	ANZ-Expansion
ELASTOMER	ANZ -Elastomer
FLUID LOSS (Low Temp)	ANZ-CG310S-P
FLUID LOSS (High Temp)	ANZ-CG210S-P
DISPERSANT	ANZ-CF410S-P
RETARDER (Low Temp)	ANZ-CH210S-T
RETARDER (High Temp)	ANZ-CH810S-T
LATEX	ANZ-CL610 L
MICROBLOCK	ANZ-CL610 S-P
BENTONITE	ANZ-GEL
DEFOAMERS	ANZ-DEF S
THIXOTROPIC AGENT	ANZ-TA
SODIUM SILICATE	ANZ-SIL-N-2.73
CSP-515	ANZ-DEF-FLC




ANZ OILFIELD SERVICES PRIVATE LIMITED

A reliable & quality products & solutions for smooth and trouble free oilfield drilling operation

ANZ

Products supplied

We have already supplied, Casing, Tubing, Drill Pipes, Drill Collars, Cementing Additives, Casing Accessories & Completion tools to our prestigious global clients.

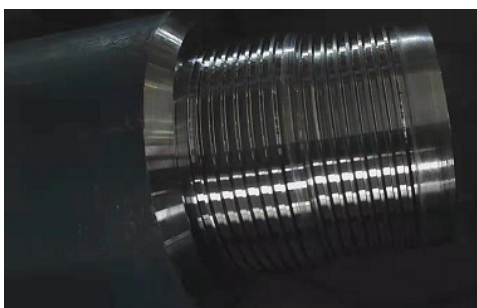



ANZ OILFIELD SERVICES PRIVATE LIMITED

A reliable & quality products & solutions for smooth and trouble free oilfield drilling operation

ANZ

Certification

ANZ OILFIELD SERVICES is an ISO 9001:2015 Certified company:



Certificate of Registration

ANZ OILFIELD SERVICES PRIVATE LIMITED

B-2-120/113, B BLOCK, 5TH FLOOR, SANALI INFO PARK, ROAD NO. 2,
BANJARA HILLS, HYDERABAD, TELANGANA-500034, INDIA

has been assessed and Certified by Otabu Certification Pvt. Ltd.
as meeting the requirements of:

ISO 9001:2015

Quality Management System

For the following scope of activities:



Stockiest, Distributors and Supplier of Piping Material, Downhole Equipment, Chemicals and Supply of Associated Services to the Energy Producing Sectors,
Including but not limited to

- Oilfield,
- Coal Bed Methane,
- Geothermal

Issue No : 01	Revision No () : NA
Date of Certification: 08 April 2022	2nd Surveillance Due: 07 April 2025
1st Surveillance Due: 07 April 2023	Certificate Expiry: 07 April 2025 <small>(subject to the company maintaining its systems to required standard)</small>

Certificate No:- 0408Q133522
To Verify this Certificate please visit at www.otabucert.com



Dr. Anita Gu
(Managing Director)

*Validity of the certificate is subject to successful completion of surveillance audit on or before due date (in case surveillance is not allowed to be conducted, this certificate shall be suspended/withdrawn). *This Certificate of Registration remains the Property of Otabu Certification Pvt. Ltd. and shall be returned immediately upon request.
Otabu Certification Pvt. Ltd., HZ-6 (Ground Floor), Phari Nagar, Uttam Nagar, New Delhi-110059 (India)
Email:- info@otabucert.com website:- www.otabucert.com

B-2, 120/113, B Block, 5th floor, Sanali Infopark, Road no . 2, Banjara Hills, Hyderabad, Telangana, INDIA
info@anzoilfield.com, sales@anzoilfield.com. +91-9711153007,+91-9711097761,

www.anzoilfield.com



ANZ OILFIELD SERVICES PRIVATE LIMITED

A reliable & quality products & solutions for smooth and trouble free oilfield drilling operation

Area of Expertise

ANZ



ANZ OILFIELD SERVICES believes that the cycle of delivery can be completed at a faster pace when the inventories are strategically located near the end user for fast access. Our strategically located inventory in Middle East, Far East, CIS Countries, North Africa and West Africa is available for immediate shipment worldwide.

Our agreements leverage large orders into significant savings for drilling and production projects. We also have a monthly capacity reservation with our manufacturer that allows us to change products up to 6 weeks prior to dispatch.

The industry we serve relies on a strong cooperation and reliable partnerships sustained over a long time. We have developed relationships with several manufacturers that allow us to hone the supply options based on the location of the mill to the drilling location and also the delivery required.

Our experience in the market allows us to build sufficient stocks of standard products so that it satisfies majority of the well designs. Provided here is a listing of select Product Offerings from ANZ OILFIELD SERVICES.



ANZ OILFIELD SERVICES PRIVATE LIMITED

A reliable & quality products & solutions for smooth and trouble free oilfield drilling operation

Technical Consultancy Division

ANZ

ANZ OILFIELD SERVICES consultancy division offer strategic and technical support in any area within the oil and gas industry, for various services from planning stage to Exploration.

We co- operate with our clients in an independent and skillful manner tapping into field experience of our experts insights into Oil and gas exploration projects. These experts have retired from highest levels of our National Oil companies, Our advice and support ranges from short-term to long-term projects.

We provide consultancy services to overseas companies in doing feasibility studies for setting up offices, market survey related to product launch, product launching and promotional and branding services in India and abroad.

We can search suitable Investors and local partners for foreign manufacturers looking to introduce new services and products in India, Our services includes but not limited to securing Projects, participation in tendering process including market intelligence, estimation, competitiveness, preparation, post offer replies & follow-ups.



ANZ OILFIELD SERVICES PRIVATE LIMITED

A reliable & quality products & solutions for smooth and trouble free oilfield drilling operation

Contact us

ANZ

You can contact us to discuss in details about the product & services we are offering:

ANZ Oilfield Services Pvt. Ltd.

B-2-120/113, B Block, 5th Floor,
Sanali Infopark, Road no. 2, Banjara
Hills, Hyderabad Telangana, India
URL: www.anzoilfield.com

Ms. AMINA KHAN – DIRECTOR

E-mail: amina@anzoilfield.com

Cell: 001 832 6594570

Mr. ZIAUDDIN KAMAL- DIRECTOR

E-mail: info@anzoilfield.com

Cell: 91 9711153007

Mr. ALI KHAN – SALES MANAGER

E-mail: sales@anzoilfield.com

Cell: 91 8765258872